

MODEL GK-604D



Model GK-604D Digital Incliner System.

APPLICATIONS

The Model GK-604D Digital Incliner System is used to determine and measure the lateral movements in and around:

- Landfills
- Slurry walls
- Caissons
- Piles
- Sheet Piling
- Tunnels
- Landslides
- Unstable Slopes
- Dam Embankments



Model 6000-22 Pulley Assembly.

INTRODUCTION

The Model GK-604D Digital Incliner System is delivered in its entirety and includes a Model 6001D-2 reel-mounted control cable and a Field PC. The signal from the probe

is transmitted by the control cable to the cable reel containing the Interface, which communicates via Bluetooth® wireless technology with the Field PC.

OPERATING PRINCIPLE

Inclinometer surveys are conducted in the conventional way using grooved inclinometer casing to engage and hold the spring-loaded wheels of the probe in a known orientation. The probe is connected to the cable and lowered to the bottom of the casing, whereupon it is raised in increments to the top of the hole. At each increment, the metal cable marker is set into a groove in the pulley assembly and a reading of the vertical deviation of the probe is taken on the handheld Field PC. The spacing of the reading increments is determined by the metal markers crimped to the

control cable, which are spaced at the same interval as the probe wheels (0.5 m or 2 ft).

Once the first set of readings is complete, the probe is removed from the casing, turned 180°, and lowered to the bottom of the casing. The reading procedure is then repeated. The difference between the two sets of tilt readings is used to calculate the vertical profile of the inclinometer casing, which, when compared to profiles taken on different dates, will reveal the magnitude and location of any deflections occurring along the length of the casing.



Model 6105 Digital Inclinator Probe.

INCLINOMETER PROBE

The Model 6105 Digital Inclinator Probe uses MEMS (Micro-Electro-Mechanical Systems) technology to provide precise biaxial measurements over a range of $\pm 90^\circ$. MEMS tilt sensors are capable of withstanding shocks as large as 5000 g. Nevertheless, a rubber cushion fixed to the bottom of the probe helps to soften the blow of a probe inadvertently allowed to hit the bottom of the grooved casing—and care must still be exercised when handling the probe.

A Digital Compass is built into the Inclinator Probe body allowing spiral surveys to be made using the same probe. The surveys obtained can be used to correct the inclinometer data sets for any twist (or spiraling)

that may be present in the installed inclinometer casings. The spiral survey data is presented on (and stored in) the same Field PC used for taking inclinometer readings. The compass will not work in close proximity to ferrous metals such as steel pipes and rebar.

The wheels of the probe are self-lubricated for longer life and the wheel assemblies are designed to be replaceable should wear become excessive.

The cable connector at the top of the probe is designed to be replaceable if it suffers damage or excessive wear. A protective cap is supplied to cover the connector when not in use.

TECHNICAL SPECIFICATIONS (INCLINOMETER PROBE)

Range ¹	$\pm 90^\circ$
Resolution (99% Confidence Interval ²)	0.00025° (0.004 mm/m)
Precision (99% Confidence Interval ³)	$\pm 0.0075^\circ$ (± 0.13 mm/m)
Nonlinearity	$\pm 0.005^\circ$ across $\pm 30^\circ$ range (± 0.09 mm/m)
Temperature Dependent Uncertainty	$\pm 0.001^\circ$ across $\pm 5^\circ$ range (± 0.016 mm/m) $\pm 0.0016^\circ$ across $\pm 15^\circ$ range (± 0.026 mm/m) $\pm 0.0026^\circ$ across $\pm 30^\circ$ range (± 0.042 mm/m)
Operating Temperature	-40°C to 65°C (-40°F to 149°F)
Wheel Base	0.5 m or 2 ft
Length \times Diameter ⁴	700 \times 25 mm or 32 \times 1 in
Casing Size I.D. ⁵	48 to 89 mm (2 to 3.5 in)
Weight (with case)	7.5 kg (16 lb)
Shock Survival ⁶	5000 g
Maximum Cable Length	500 m (1640 ft)
Compass Sensor Resolution	$\pm 0.1^\circ$
Compass Sensor Repeatability	$\pm 1.6^\circ$

¹Calibrated Range: $\pm 30^\circ$.

²99% confidence interval (i.e. 99 out of 100 individual readings fall within this tolerance).

³Includes random walk (changes between consecutive readings that have no discernible cause) and seismic noise during testing.

⁴The cable connector adds 150 mm to the length of the probe.

⁵The probe is designed for use in all standard inclinometer casing up to a maximum diameter of 89 mm (3.5 inches).

⁶The Inclinator Probe is a highly sensitive device and should be treated with great care at all times in order to maintain calibration. Particular attention should be given to preventing the probe from hitting the bottom of the casing with any impact.



Model 6000-17 Cordura® Carry Case, with padded interior, is used to protect the probe, FPC-3 Field PC and accessories from shock during transportation. Case contents (top; left to right): Inclinometer Probe, Universal Power Adapter, Wall Charger for the Field PC, Deoxit Spray and Waterproof Grease, Field PC, Spare Parts for the Inclinometer Probe, Car Charger and USB cable for the Field PC, Cable Reel Charger.

CONTROL CABLE

The Model 6001D-2 Control Cable is lightweight, less than 8 mm in diameter and comprises a central core and a double pressure extruded Polyurethane jacket with an additional braid between the jacket layers. The minimum breaking strength is 500 lbs. The conductors and stainless steel aircraft wire members are firmly attached to the probe cable connector, which effectively prevents the cable from stretching and allows for a heavy



pull in the event the probe becomes jammed in the casing. Non-slip metal depth markers are crimped onto the cable at intervals equal to the wheel base of the inclinometer probe (0.5 m or 2 ft). These markers engage with the pulley assembly while the probe is being read.

ELECTRIC CABLE REEL

The Model GK-604D-EW Electric Cable Reel System comprises a 12 volt electric winch, a cable reel with 300 m capacity, an automatic brake, and a galvanized steel tripod. The winch features a speed control, direction control, precision slip rings and, along with the cable reel, is mounted in a protective steel transport case. The brake is designed to stop the winch every 0.5 m and features a hand switch to trigger movement to the next 0.5 m interval. It fits on top of



the steel tripod, which sits over the inclinometer casing to facilitate the inclinometer survey process.

CABLE REEL AND CASE

The cable reel contains the Interface, which converts the digital signal from the probe into a radio signal and transmits it to the Field PC via Bluetooth®. The size of the reel varies with cable length. Reels for cables under 200 m (500 ft) are supplied with a nylon carrying case.



CABLE PULLEY

The Model 6000-22 Cable Pulley is used to guide the cable while raising and lowering the inclinometer probe and to grip the depth markers of the control cable while taking a survey. The pulley places no stress on the cable markers and removes any tendency for markers to slip over the cable as when using cable holds.

The pulley assembly is designed to fit casings sold by GEOKON but will also fit most casings that have an external diameter between 85 mm and 70 mm. A casing extension can be used in situations where the inclinometer casing is inside a protective tube or below grade level.

TECHNICAL SPECIFICATIONS (GK-604D INTERFACE)

Battery	> 40 hours continuous operation, per charge
Temperature Range	-30 °C to +50 °C


DUMMY PROBE

The Model ⁶⁰⁰⁰₁₀ Dummy Probe is geometrically identical to the Model ⁶¹⁰⁵ Probe but does not contain any sensors. It is used to check that installed inclinometer casings are free of obstructions or distortions that might prevent removal of the



standard probe. The dummy probe is lowered and raised using coated stainless steel aircraft cable.

MODEL FPC-3 FIELD PC

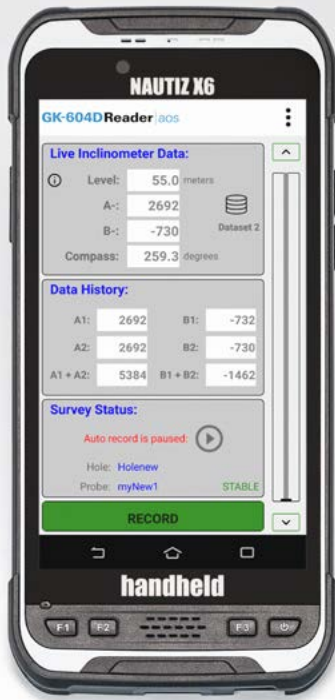

Model FPC-3 Field PC showing a Live Inclinometer Data reading screen shot.

OPERATING PRINCIPLE

The Model FPC-3 Field PC is a rugged, handheld, easy-to-use instrument featuring a 6-inch touchscreen display, high-resolution front and rear cameras, an array of built-in sensors, and a broad spectrum of communication technologies. It is fully dust proof, waterproof, can operate in extreme temperatures, and is resistant to impact, vibrations, humidity and altitude.

The FPC-3 is used to read digital inclinometer probes by communicating with the Interface in the cable reel via Bluetooth® wireless technology. Probe readings are stored by tapping "Record" on the Field PC display. An audible beep indicates the completion of the reading storage. All readings are saved to the internal Solid State Drive. The checksum can be displayed on the LCD screen during a deflection survey, a useful tool for checking the survey data in the field to minimize reading errors.

A spiral survey can be performed at the same time as the normal inclinometer survey. The compass heading is displayed with the inclinometer readings during the survey. Spiral survey data is stored in a separate data file and can be used to correct the inclinometer data sets for any twist (or spiraling) of the inclinometer casing.

Survey data, log files, and entire databases can be exported as a file or email attachment. Data reduction, graphing and reporting can be accomplished on a PC using SiteMaster Software. (Sold separately. Please see the SiteMaster data sheet for details).

The Field PC comes complete with a USB sync cable, Lithium-Ion battery, AC wall charger (with international plug kit), screen protector, and Quick Start Guide.

TECHNICAL SPECIFICATIONS (FPC-3 FIELD PC)

Operating Temperature	-20°C to 55°C
Storage Temperature	-40°C to 70°C
Processor	Qualcomm® Snapdragon™ 626 MSM8953 Pro, 8 Cores 2.2 GHz
Memory	4 GB
Data Storage	64 GB
Operating System	Android 11 (GMS)
Display	1080 x 1920 pixel sunlight readable 6" capacitive multi-touch (10 points), with glove/rain mode and Corning® Gorilla® Glass
Battery	3.8V 8000 mAh (30.4 Wh), field replaceable
Communication	Cellular (WWAN): 2G, 3G, 4G/LTE WLAN: 2.4GHz + 5 GHz, 802.11a/b/g/n/ac PAN: BT V4.2LE NFC: 13.56 MHz, ISO 14442A/B, ISO 15693 Audio: Headphone supprt via Type-C, Front-facing speaker, Microphone
Positioning	GPS/AGPS/GLONASS/Galileo/BeiDou
Sensors	Gyroscope Compass Accelerometer Pressure Proximity Ambient Light
Ports	Type-C OTG Qualcomm® quick charge 3.0 GNSS antenna connector Back connector for expandability 1x micro SDXC (2.56 GB) 2x nano SIM
Camera	Rear: 13 megapixel with auto-focus and flash Front: 5 megapixel
Weight	380 g (13.4 oz)
L x W x H	194 x 92 x 15 mm (7.6 x 3.6 x 0.6 in.)

ORDERING INFORMATION

Model GK-604D-20M: Inclinometer Readout System with Digital MEMS Biaxial Inclinometer Probe, FPC-3 Field PC, Software, Cable Reel, requisite Carry Cases, Pulley Assembly, and 20 m Cable marked every 0.5 m.

Model GK-604D-30M: As above, with 30 m Cable.

Model GK-604D-50M: As above, with 50 m Cable.

Model GK-604D-70M: As above, with 70 m Cable.

Model GK-604D-100M: As above, with 100 m Cable.

Model GK-604D-130M: As above, with 130 m Cable.

Model GK-604D-150M: As above, with 150 m Cable.

Model GK-604D-170M: As above, with 170 m Cable.

Model GK-604D-200M: As above, with 200 m Cable.

Model GK-604D-100E: Inclinometer Readout System with Digital MEMS Biaxial Inclinometer Probe, FPC-3 Field PC, Software, Cable Reel, requisite Carry Cases, Pulley Assembly, and 100 ft Cable marked every 2 ft.

Model GK-604D-150E: As above, with 150 ft Cable.

Model GK-604D-200E: As above, with 200 ft Cable.

Model GK-604D-250E: As above, with 250 ft Cable.

Model GK-604D-300E: As above, with 300 ft Cable.

Model GK-604D-350E: As above, with 350 ft Cable.

Model GK-604D-400E: As above, with 400 ft Cable.

Model GK-604D-450E: As above, with 450 ft Cable.

Model GK-604D-500E: As above, with 500 ft Cable.