

Wireless Vibrating Wire Interface


Applications

The Model 8040 is ideally suited for wireless data transmission with Micro-1000 and Micro-800 Data Acquisition Systems. Applications include...

- Excavations
- Pump Tests
- Landfills
- Dams
- Structural monitoring



● Model 8040T configured to read a Model 4500 Vibrating Wire Piezometer.

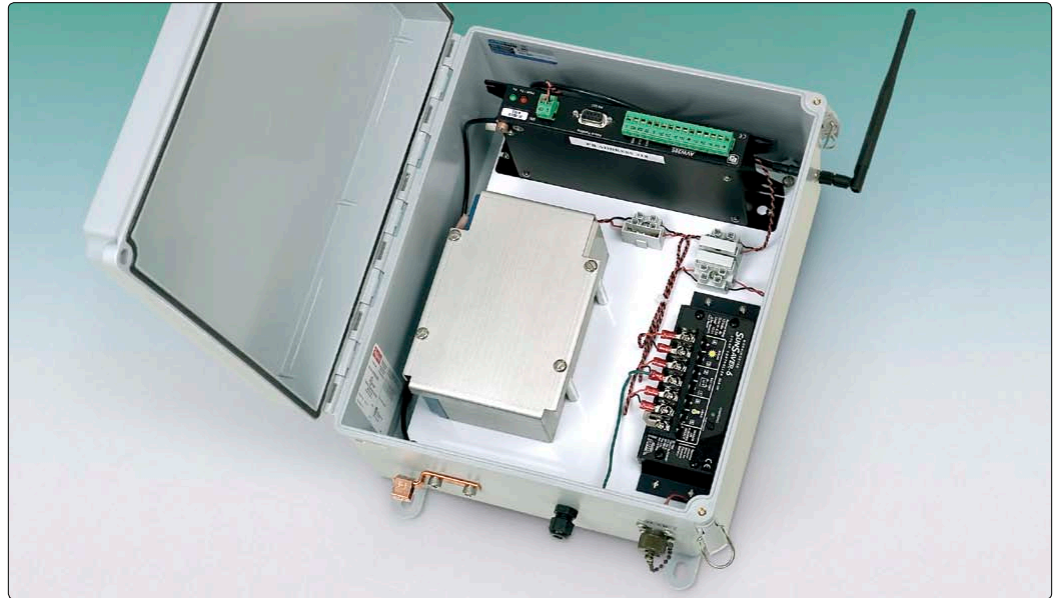

● Model 8040 2-Channel Wireless Vibrating Wire Interface Module.

Operating Principle

The 8040 Series Wireless Vibrating Wire interface is designed to expand the data collection possibilities of the Micro-1000 and Micro-800 Series Dataloggers.

The wireless connectivity provided by the 8040 Series is particularly suitable where dataloggers are deployed over wide areas and where construction activity may render the use of conventional hard-wired systems impractical. The wireless connection also eliminates the need for running lengthy cables.


Available for 2, 4 or 16 sensors (VW plus thermistor), the 8040 Wireless Vibrating Wire Interface comprises Campbell Scientific's AVW206 (or AVW216) spectrum analyzer (with built-in 900 MHz or 2.4 GHz radio transmitter), power supply and antenna. It's housed in a rugged NEMA 4X enclosure designed for use in harsh environments with wide temperature tolerance, and resistance to moisture and humidity.

The 2 and 4 channel versions are also available in a rugged waterproof enclosure (Model 8040T). The standard enclosure is PVC (optional stainless steel also available). This design is particularly useful for installations below grade, in manholes containing the instrumentation to be monitored (see illustration left).

The AVW206 and AVW216 use an innovative spectral interpolation method for measuring the sensor's resonant frequency. With this spectral interpolation method, the module excites the vibrating wire sensor, measures the response, performs a Fourier transform on the response, and returns the result with a resolution better than 0.001 Hz. Because spectral analysis can distinguish signal from noise on the basis of frequency content, this method offers improved immunity to competing noise.

The power supply for the 8040 is generally provided by a 12 V lead acid battery, rechargeable by solar panels or AC mains. The 8040T is powered using four 19 Ah lithium D cells.


The Model 8040 commonly uses a whip antenna for data transmission, but high gain Yagi and Omnidirectional antennae are also available (please consult Geokon for selection of the appropriate antenna). The 8040T is typically supplied with a manhole lid antenna which allows for installations in roads, runways or other situations where a flush

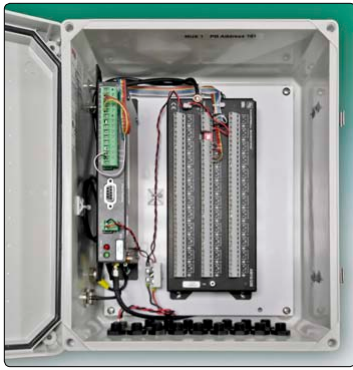

● Model 8040 16-Channel Wireless Vibrating Wire Interface Module (external battery option, battery not shown).



● Remote datalogger base station (or hub) with receiving and transmitting antennae.

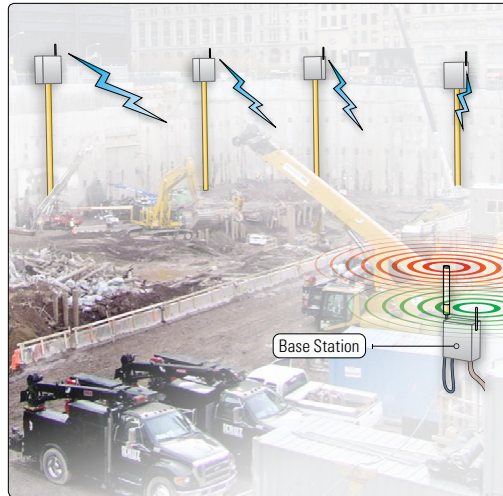

● Illustration showing the Model 8040 Series Wireless Vibrating Wire Interface, monitoring in-place inclinometers.

mounted system is required. This antenna is of a rugged (tamper-proof) design allowing it to be mounted directly onto a manhole lid. It is waterproof and resistant to motor oils and gasoline.

Wireless data transmission, from the Model 8040 to the Micro-1000/Micro-800 Dataloggers is capable over distances up to several miles and relies on Line-Of-Sight (LOS). Where LOS is restricted, or where signals are required to go around corners (as may be found in urban environments), Repeater Stations can be incorporated into the monitoring system.

Several Model 8040s can be connected to Micro-1000 and/or Micro-800 Dataloggers, depending on the datalogger/multiplexer configuration (please contact Geokon for details).

Software

Windows® based MultiLogger Suite software allows for an efficient means of deploying the datalogger by providing easy to use menus and selections to build the datalogger program, monitoring the current activity, and collecting the data. Vista Data Vision (VDV) software provides a complete data management package for data storage, browsing and reporting and for publishing data to the Internet.

Technical Specifications

Wireless Vibrating Wire Interfaces

Input Range	(vibrating wire) 100 to 6500 Hz (thermistor) ± 2500 mV
Resolution	(vibrating wire) 0.001 Hz RMS (thermistor) 0.001 Ω RMS
Accuracy	(vibrating wire) $\pm 0.013\%$ of reading (thermistor) $\pm 0.25\%$ of reading
Wireless Transmission Range	up to 10 miles (when using a higher gain directional antenna, under ideal conditions)
Battery	12 V, 7 Ah Gel Cell
Temperature Range	-25°C to +50°C (-55°C to +80°C optional)
L x W x H¹	8040-2 (2-Channel): 305 x 254 x 152 mm 8040-4 (4-Channel): 356 x 305 x 203 mm 8040-16 (16-Channel): 356 x 305 x 203 mm
Diameter x H	8040T-2/4 (2/4-Channel): 168 x 380 mm

¹Does not include mounting feet.

CR800

Range	(analog) ± 2.5 millivolts to ± 5 volts (frequency) DC to 200 kHz
Resolution	(analog) 0.33 microvolts to 1333 microvolts (frequency) ± 35 nS/no. cycles measured
Accuracy	(analog) $\pm 0.1\%$ of reading (frequency) $\pm 0.01\%$ of reading
Excitation Output	± 2.5 V at 25 mA (max)
Temperature Range	-25°C to +50°C (-55°C to +80°C optional)
Battery	C-Cell Lithium 8.5 AH

Radio Modem

Operating Frequency	RF401: 910 to 918 MHz RF411: 920 to 928 MHz RF416: 2.450 to 2.460 GHz
Type	Frequency Hopping Spread Spectrum (FHSS) Transceiver
I/O Data Rate	38.4 K, 19.2 K; 9600, 4800 or 1200 bps
Transmitter Power Output	RF401, RF411: 100 mW nominal RF416: 50 mW nominal
Power	9 to 16 VDC
Average Current Drain	Stand-by: < 1 mA (power-saving options used) Receiving: 24 mA (RF401, RF411), 36 mA (RF416) Transmitting: < 75 mA (RF401, RF411), 75 mA (RF416)
Operating Temperature	Standard: -25° to +50°C Extended ¹ : -55°C to +85°C (RF401, RF411 only)

¹The push button that allows customers to check/edit programmable settings while the radio is connected to a computer may not operate at temperatures colder than -25°C.



The World Leader in Vibrating Wire Technology™

Geokon, Incorporated
48 Spencer Street
Lebanon, NH 03766
USA

Geokon maintains an ongoing policy of design review and reserves the right to amend products and specifications without notice.

☎ 1 • 603 • 448 • 1562
☎ 1 • 603 • 448 • 3216
✉ geokon@geokon.com
🌐 www.geokon.com

©2011 Geokon, Incorporated. All Rights Reserved | Doc. Rev. A, 11/11