



Fiber Optic Temperature Sensor

Applications

The Model FP4700 Fiber Optic Temperature Sensor is designed to measure temperatures wherever high accuracy is required. They are particularly suitable for use in or on...

- Concrete
- Steel structures
- Nuclear or hazardous environments



• Model FP4700 Fiber Optic Temperature Sensor.

Operating Principle


Geokon's fiber optic temperature sensors are designed for use in environments where high levels of electrical interference exist or where intrinsic safety is an issue.

The FP4700 uses the temperature-dependent birefringence of a specially selected crystal as the temperature transduction mechanism. This crystal does not show thermal creep or aging as with some other fiber optic sensors.

Advantages and Limitations

The standard operating range is from -40°C to $+80^{\circ}\text{C}$. Higher temperature ranges up to 350°C are available on request.

Other advantages include: EMI/RFI immunity; intrinsically safe; transmission over long cables; and high voltage immunity.

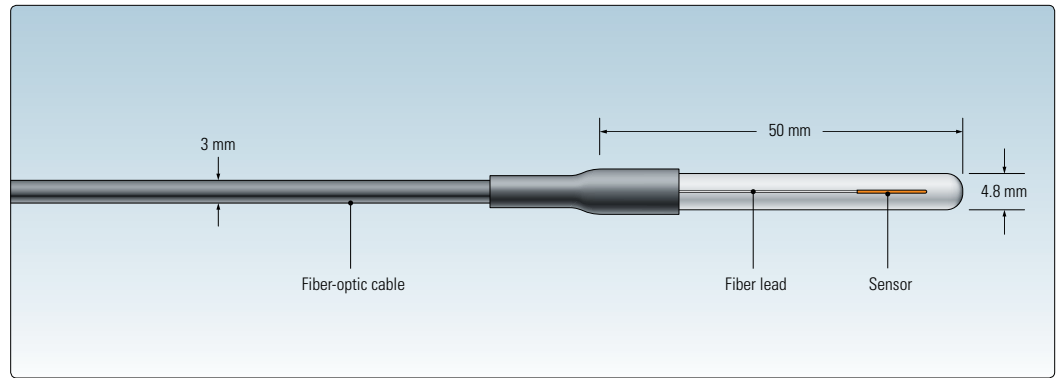

• The Model FP4700 components and dimensions.

Technical Specifications

Temperature Range (Nominal)	-40°C to +80°C
Temperature Range (High Temperature)	-40°C to +250°C
Resolution	0.1°C
Accuracy ¹	±1.0°C
Response Time	1.5 s typical
Operating Humidity Range	0-100%
EMI/RFI Susceptibility	complete immunity
Calibration	NIST traceable
Cable Length ¹	1.5 m (standard)
Optical Connector	SC (standard)
Cable Sheathing	Polyurethane (Nominal); Teflon® (High Temperature)
Signal Conditioner Compatibility	all Opsens WLPI signal conditioners
Length × Diameter	50 × 4.8 mm (sensor)

¹Total accuracy over the full range including both signal conditioner and sensor errors. Higher accuracy available on request.



Geokon, Incorporated
48 Spencer Street
Lebanon, NH 03766
USA

☎ 1 • 603 • 448 • 1562
☎ 1 • 603 • 448 • 3216
✉ geokon@geokon.com
🌐 www.geokon.com

The World Leader in Vibrating Wire Technology™

Geokon maintains an ongoing policy of design review and reserves the right to amend products and specifications without notice.

©2011 Geokon, Incorporated. All Rights Reserved | Doc. Rev. C, 08/11